

◆ Features:

- High brightness, high power
- wide beam angle - 170deg
- Chain 40pcs
- waterproof IP 67, injection molding
- internal constant current control
- internal radiator for better heating dissipation
- 5y warranty

◆ Application:

- 3D letters
- Lightboxes 6-15 cm

◆ Photo:**CE**




MW-MLD-M-2W-LENS

Supply	Working voltage	12Vdc +/- 5%
	Power consumption (1pcs)	0.96W
	Current consumption	0.08A
	Chain power consumption	38,4W
LED	LED type	2835
	Q-ty	2
	Colour temperature	W-white (6000-8000K) CW-cold white (10000-14000K)
	Flux	89Lm
	Flux density	93lm/W
	Beam angle	170° (PC)
	Lifetime	L70B50 > 35 hours
Connection	Soldering	Yes
	Connectors	Yes
Wire	Wire lenght	150 mm
	Wires mark	White-red (+) white (-)
Features	IP degree	IP 67
	Temperaure	Working: -25°C ... +55°C Stoerage: -40°C ... +65°C
Dimmesion	Height, width, lenght	5,9 x 18 x 48 mm
Montage	Adhesive tape	Yes
	Screw	Yes
	Hole size	M3
Other	Material	ABS
	Q-ty per 1mb	5pcs
Packing	Chain	40pcs (7,9mb)
	Bag	160pcs
	Cartoon box smal / big	1280pcs/2560pcs

◆ DIMMENSION:

Unit: mm

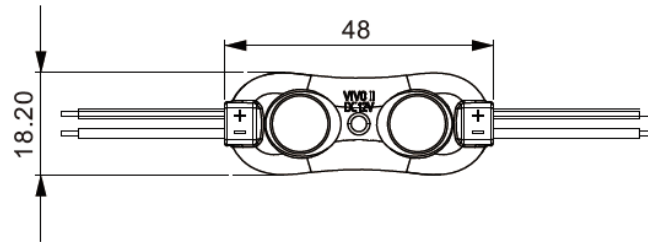

◆ TYPICAL APPLICATION

